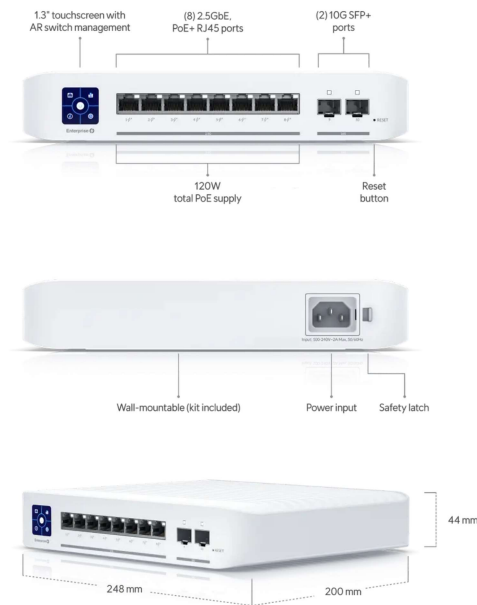


## Tech Specs

UniFi UISP Branding

[UniFi Cloud Gateways](#)[WiFi](#)[Switching](#)[Cloud Keys & Gateways](#)[Camera Security](#)[Door Access](#)[Phone System](#)[New Integrations](#)[Accessories](#)[Switching](#) / Enterprise 8 PoE[Datasheet](#)[Installation Guide](#)[Marketing Images](#)**Mechanical**

<b>Dimensions</b>	200 x 248 x 44 mm (7.9 x 9.8 x 1.7")
<b>Weight</b>	2.4 kg (5.29 lb)
<b>Enclosure material</b>	Polycarbonate
<b>Mount material</b>	Polycarbonate

**Hardware**

<b>Management interface</b>	Ethernet In-Band
<b>Networking interface</b>	(8) 2.5 GbE, PoE+ RJ45 ports (2) 10G SFP+
<b>PoE interface</b>	(8) PoE/PoE+ (Pins 1, 2+; 3, 6-)
<b>Total non-blocking throughput</b>	40 Gbps
<b>Switching capacity</b>	80 Gbps
<b>Forwarding rate</b>	59.52 Mpps
<b>Power method</b>	(1) Universal AC input, 100—240V AC, 2A Max., 50/60 Hz

Power supply	AC/DC, internal, 150W
Supported voltage range	100—240V AC
Max PoE power	120W
Max. PoE+ wattage per port by PSE	32W
Voltage range PoE mode	PoE: 44—57V PoE+: 50—57V
LCM Display	(1) 1.3" color touchscreen
Mounting	Desktop-mountable (Do not physically stack the USW-Enterprise-8-PoE.)
ESD/EMP protection	Air: ± 16kV, contact: ± 12kV
Operating temperature	-5 to 45° C (23 to 113° F)
Operating humidity	10 to 90% noncondensing
Certifications	CE, FCC, IC

---

## LEDs

System	Status
Ethernet	Link/activity
SFP+	Link/activity

---

## Application Requirements

UniFi Network	Version 6.3.51 and later
---------------	--------------------------

### Stay in Touch



[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2023 Ubiquiti, Inc. All rights reserved.