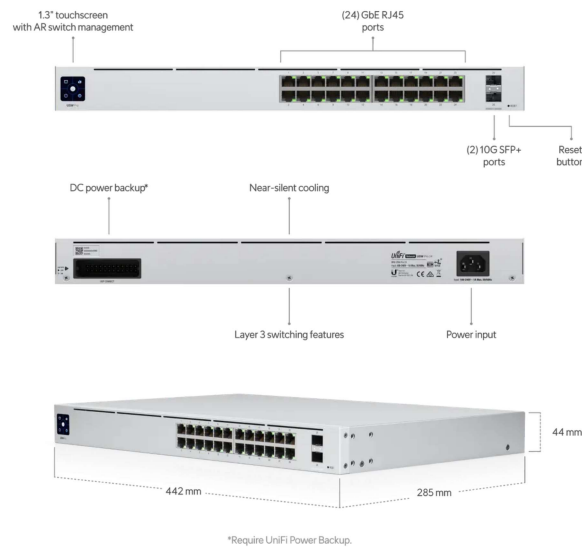


Tech Specs

UniFi UISP Branding

[UniFi Cloud Gateways](#)[WiFi](#)[Switching](#)[Cloud Keys & Gateways](#)[Camera Security](#)[Door Access](#)[Phone System](#)[New Integrations](#)[Accessories](#)[Switching / Professional 24](#)[Datasheet](#)[Installation Guide](#)[Marketing Images](#)**Mechanical**

Dimensions	442.4 x 285.4 x 43.7 mm (17.4 x 11.2 x 1.7")
Weight	Without mounting brackets: 3.5 kg (7.7 lb) With mounting brackets: 3.6 kg (7.9 lb)
Enclosure material	SGCC steel

Hardware

Management interface	Ethernet In-Band
Networking interface	(24) GbE RJ45 ports (2) 1/10G SFP+ ports
Total non-blocking throughput	44 Gbps
Switching capacity	88 Gbps
Forwarding rate	65,472 Mpps
Power method	Universal input, 100—240V AC, 50/60 Hz USP RPS DC input 11.5V DC, 2.61A
Power supply	AC/DC, internal, 36W
Supported voltage range	100—240V AC
Max. power consumption	30W

ESD/EMP protection	Air: ± 16kV, contact: ± 12kV
LCM display	(1) 1.3" touchscreen
Button	Factory reset
Shock and vibration	ETSI300-019-1.4 Standard
Operating temperature	-5 to 45° C (23 to 113° F)
Operating humidity	10 to 90% noncondensing
Certifications	CE, FCC, IC

LEDs

System	Status
Ethernet	Speed/link/activity
SFP+	Speed/link/activity
RPS	Status

Application Requirements

UniFi Network	Version 5.12.11 and later
----------------------	---------------------------

Stay in Touch

[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2023 Ubiquiti, Inc. All rights reserved.