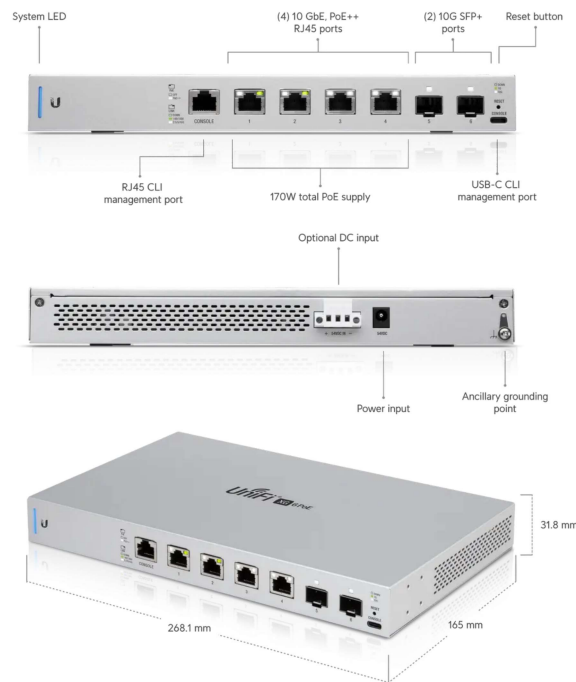


## Tech Specs

UniFi UISP Branding

[UniFi Cloud Gateways](#)[WiFi](#)[Switching](#)[Cloud Keys & Gateways](#)[Camera Security](#)[Door Access](#)[Phone System](#)[New Integrations](#)[Accessories](#)[Switching](#) / XG 6 PoE (Gen1)[Datasheet](#)[Marketing Images](#)**Mechanical**

<b>Dimensions</b>	165 x 268.1 x 31.8 mm (6.5 x 10.6 x 1.3")
<b>Weight</b>	1.3 kg (2.9 lb)
<b>Enclosure material</b>	SGCC steel

**Hardware**

<b>Management interface</b>	Ethernet In-Band (1) RJ45 Serial port Out-of-Band (1) USB Type C port Out-of-Band
<b>Networking interface</b>	(4) 1/2.5/5/10 GbE RJ45 ports (2) 1/10G SFP+ ports
<b>PoE interface</b>	(4) PoE++ (Pair A 1, 2+; 3, 6-) (Pair B 4, 5+; 7, 8-)
<b>Power method</b>	54V DC, 3.88A power adapter (Included) DC input with terminal block
<b>Power supply</b>	External AC/DC adapter (Included) DC power source

Supported voltage range	44-57V DC
Max. power consumption	40W (Excluding PoE output.)
Total available PoE	170W
Max. PoE wattage per port by PSE	PoE++: 60W
Voltage range PoE mode	PoE: 44-57V PoE+/PoE++: 50-57V
ESD/EMP protection	Air: ± 18kV, contact: ± 12kV
Operating temperature	-5 to 45° C (23 to 113° F)
Operating humidity	5 to 95% noncondensing
Certifications	CE, FCC, IC

---

### LEDs

System	Status
Ethernet	PoE Link/Speed/Activity
SFP+	Link/Activity

### Stay in Touch

[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2023 Ubiquiti, Inc. All rights reserved.