

## Tech Specs

UniFi UISP Branding


60 GHz Wireless Wireless Fiber Wired Accessory Tech

Fiber / UISP Fiber OLT XGS

Datasheet

Installation Guide

Marketing Images

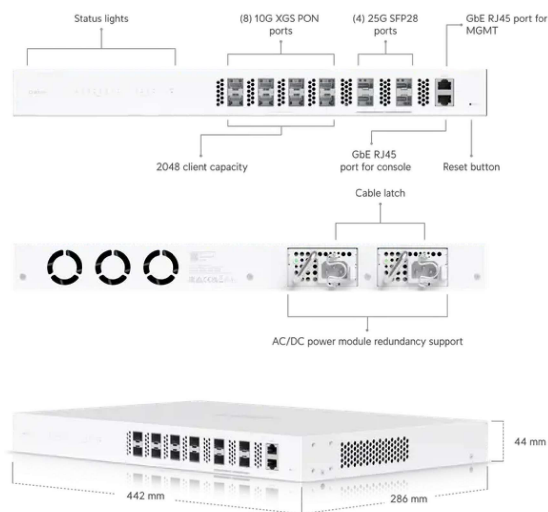

### Mechanical

Dimensions	442.4 x 285.6 x 43.7 mm (17.4 x 11.2 x 1.7")
Weight	5.29 kg (11.7 lb)
Enclosure material	SGCC steel

### Hardware

Networking interface	(8) XGS/XG/GPON ports (4) 1/10/25G SFP28 ports* <small>*The four SFP28 ports don't support mixed speed at 25 Gbps mode. Once one of the SFP28 ports is configured at 25 Gbps mode, the others will be limited at 25 Gbps too. The SFP28 ports only support mixed speed when all ports are at 1 Gbps or 10 Gbps.</small>
Management interface	Ethernet out-of-band Ethernet in-band RJ45 serial console port Bluetooth
Memory	512 MB DDR3
Onboard flash storage	64 MB NOR + 512 MB NAND
Power method	(1) Universal AC input, 100-240V AC, 50/60 Hz
Power supply	(2) Hotswap AC/DC PSU
Supported voltage range	100-240V AC
Max. power consumption	70W


<b>Button</b>	(1) Factory reset
<b>Operating temperature</b>	-10 to 45° C (14 to 113° F)
<b>Operating humidity</b>	10 to 95% non-condensing
<b>Certifications</b>	CE, FCC, IC

---

## LEDs

<b>System</b>	Slow blinking white: system is booting Fast blinking white: reset to default Blinking white/blue: system is upgrading Slow blinking blue: system is connecting to UISP Fast blinking blue: locate system Steady white: system is ready Steady blue: system is ready and connected to UISP
<b>MGMT port</b>	(1) White, steady on after link is up
<b>PON ports</b>	(8) Steady white: PON link
<b>SFP28 ports</b>	(4) White, steady on after link is up

### Stay in Touch

[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2023 Ubiquiti, Inc. All rights reserved.